



## Customer Information Sheet



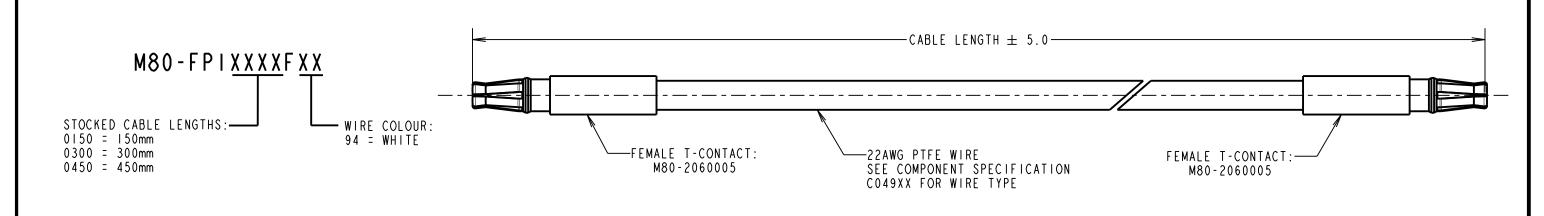

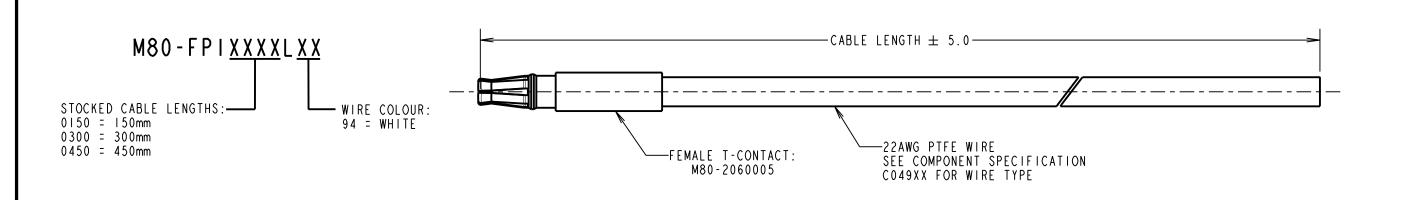

- I. CABLE ASSEMBLIES ARE BULK PACKED IN BAGS.
- 2. CONTACT INSERTION / WITHDRAWAL KIT = Z80-280.
- 3. 22 AWG WHITE PTFE WIRE (MAX INSULATION Ø1.1mm). FOR WIRE TYPE SEE CO49XX COMPONENT SPECIFICATION (LATEST ISSUE).
- 4. SEE COMPONENT SPECIFICATION COO5XX (LATEST ISSUE) FOR FULL CONTACT SPECIFICATION.
- 5. PATENT PENDING: GB 1616011.1





www.harwin.com technical@harwin.com THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
IENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES X. = ±1mm X.X = ±0.50mm  $X.XX = \pm 0.20$ mm  $X.XXX = \pm 0.01$ mm ANGLES = ±5°

UNLESS STATED

MATERIAL: FINISH:

S/AREA:

SEE ABOVE

DATAMATE PRE-CRIMPED T-CONTACT WIRE ASSEMBLIES

SEE ABOVE

mm<sup>2</sup>

DRAWING NUMBER:

M80-FPIXXXXXXX ٥F ٍ